

LIMBUS

CONTROL YOUR LIGHT



BY  *TD Lighting Solutions*



TLS266NI-D263 Series

FAMILY DATASHEET



PRODUCT PICTURE



GENERAL SPECIFICATIONS

Product Code	TLS266NI-D263-60
Description	High Bay Lighting
Degree (FWHM)	64°
Efficiency	92%
Type	266in1
Size (mm) W x L x H	Q262.8x9x6
Material / Operating Temp.	PC / -40 °C ~ +120 °C max
Fastening	Screw
Box Size (mm) WxLxH	
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Storage Temperature	0 °C ~ 40 °C max
Compatible LED MODULE	

PHOTOMETRIC SPECIFICATIONS

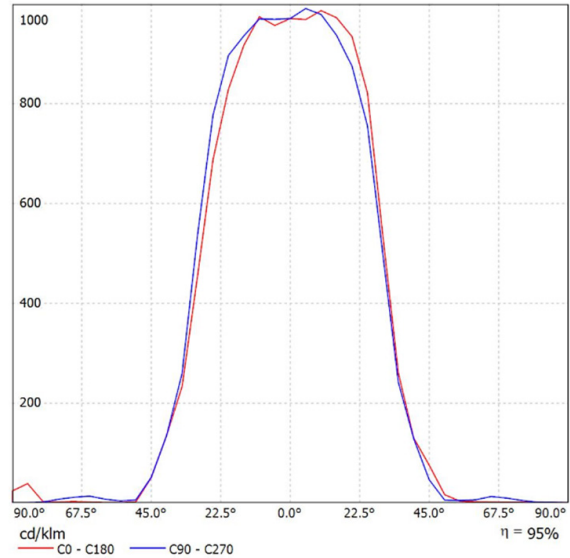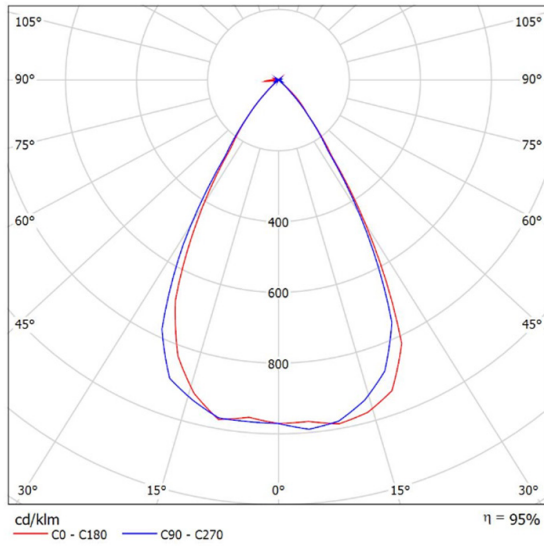

APPLICATION NOTES

- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- Storage environment temperature is 0°C~40°C, humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

TLS266NI-D263-90

LED OPTIC DATASHEET

www.limbus.com.tr
444 27 33

LIMBUS
CONTROL YOUR LIGHT


PRODUCT PICTURE



GENERAL SPECIFICATIONS

Product Code	TLS266NI-D263-90
Description	High Bay Lighting
Degree (FWHM)	90°
Efficiency	92%
Type	266in1
Size (mm) W x L x H	Q262.8x9.6
Material / Operating Temp.	PC / -40 °C ~ +120 °C max
Fastening	Screw
Box Size (mm) WxLxH	
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Storage Temperature	0 °C ~ 40 °C max
Compatible LED MODULE	

PHOTOMETRIC SPECIFICATIONS

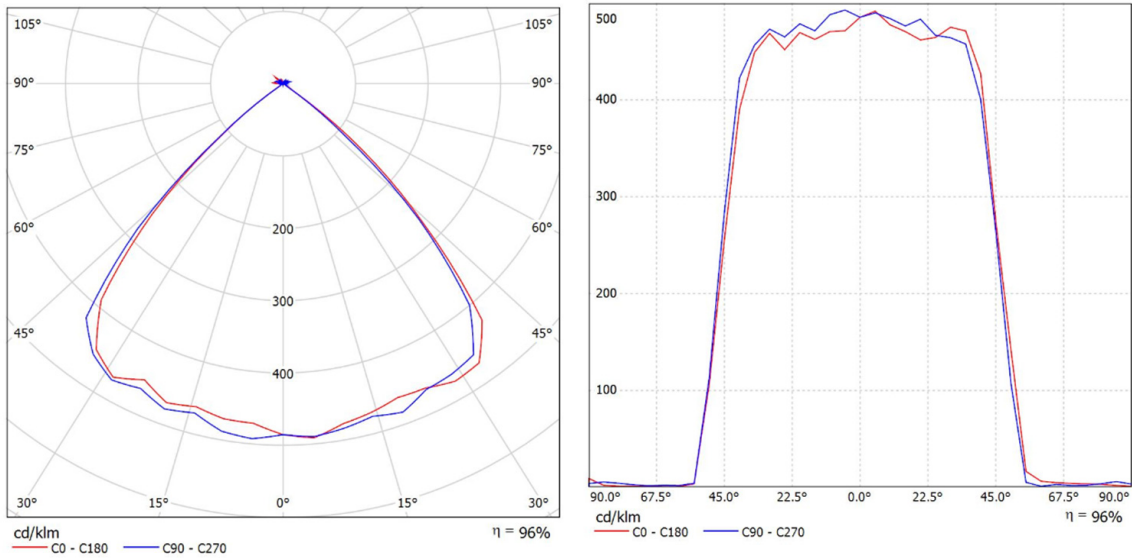

APPLICATION NOTES

- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- Storage environment temperature is 0°C~40°C, humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

TLS266NI-D263-120

LED OPTIC DATASHEET

www.limbus.com.tr
444 27 33

LIMBUS
CONTROL YOUR LIGHT


PRODUCT PICTURE



GENERAL SPECIFICATIONS

Product Code	TLS266NI-D263-120
Description	High Bay Lighting
Degree (FWHM)	120°
Efficiency	92%
Type	266in1
Size (mm) W x L x H	Q262.8x9.6
Material / Operating Temp.	PC / -40 °C ~ +120 °C max
Fastening	Screw
Box Size (mm) WxLxH	
Box Quantity	
Box Weight (g)	
Rohs Complaint	Yes
Storage Temperature	0 °C ~ 40 °C max
Compatible LED MODULE	

PHOTOMETRIC SPECIFICATIONS

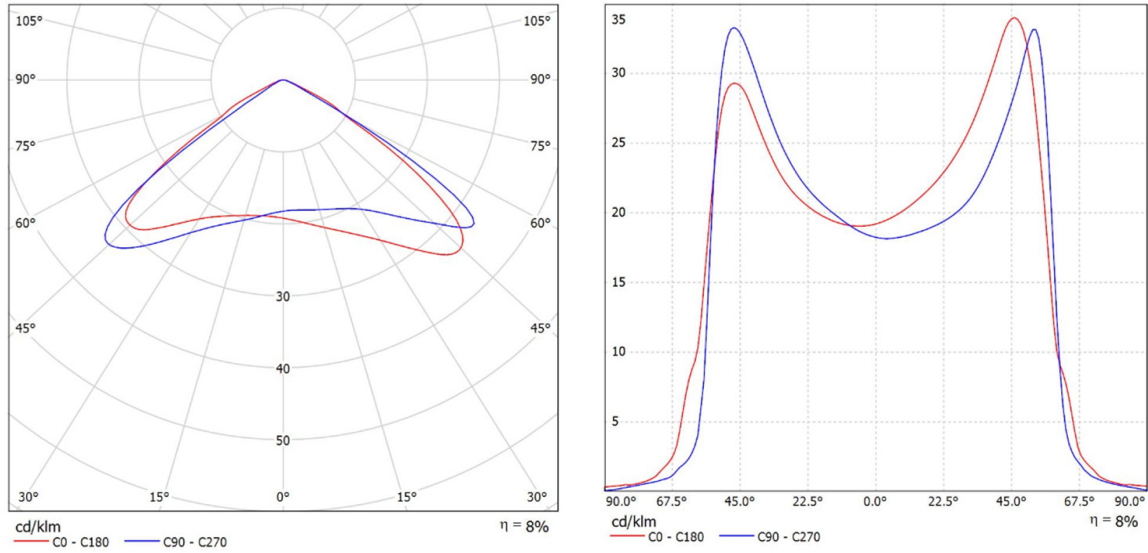

APPLICATION NOTES

- Please use a litter water and soft fabric (air-laid paper) to clean the lens & reflector if necessary.
- Forbid to use industrial solvent to clean the lens, such as alcohol.
- Storage environment temperature is 0°C~40°C, humidity is 30%~95%.
- Optic Lens has the function to change the ray of light, it is made of optical material, the effect shall be influenced once pollute. Please do not open the packing before use it, to avoid the dust pollution.
- Protect the product from the sun and other ultraviolet ray, as these will lead to aging, change color, crack, etc.
- Please ware gloves once install the lens, avoid to abrasion the lens surface.
- Forbid to use acidic or alkaline solution touch the product, avoid to generate the chemical reactions.

